



GB04/4614



INVESTOR IN PEOPLE

The Patent Office
 Concept House
 Cardiff Road
 Newport

South Wales
 NP1 0E8QQI 3 DEC 2004

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

H. Behan


Dated

10 November 2004

**PRIORITY
 DOCUMENT**

SUBMITTED OR TRANSMITTED IN
 COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

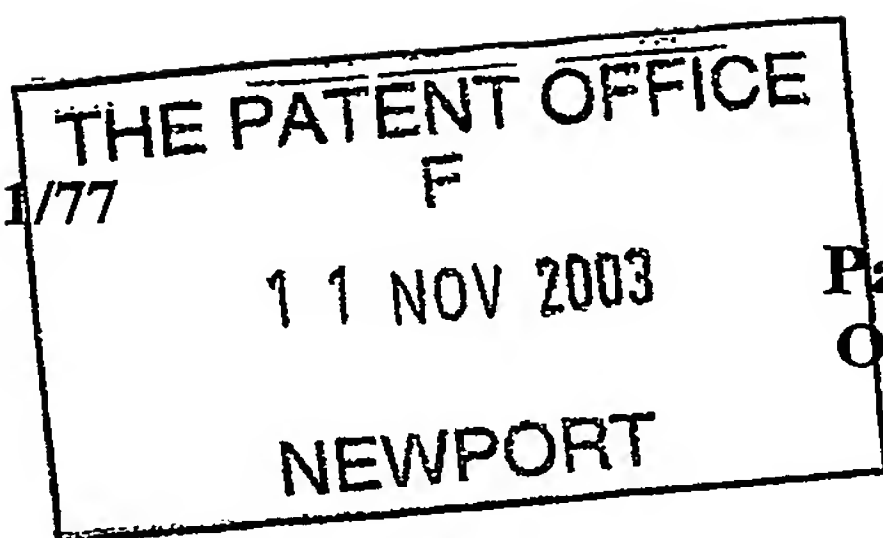

The
Patent
Office

11 NOV 03 E061073-7 D00333
P01/7700 0.00-0326205.2

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP10 8QQ.

1.	Your reference	RJB/P470030GB	11 NOV 2003
2.	Patent application number (The Patent Office will fill in this part)	0326205.2	
3.	Full name, address and postcode of the or of each applicant (<i>underline all surnames</i>)	Torotrak (Development) Ltd., 1 Aston Way, Leyland, Lancashire, PR26 7UX.	
	Patents ADP number (<i>if you know it</i>)		
	If the applicant is a corporate body, give the country/state of its incorporation	ENGLAND.	7376650002
4.	Title of the invention	ASYMMETRIC ROLLER CROWN	
5.	Name of your agent (<i>if you have one</i>)	W.P.THOMPSON & CO.	
	"Address for service" in the United Kingdom to which all correspondence should be sent (<i>including the postcode</i>)	Coopers Building, Church Street, Liverpool, L1 3AB.	
	Patents ADP number (<i>if you know it</i>)	0000158001	
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (<i>if you know it</i>) the or each application number.	Country	Priority application number (<i>if you know it</i>)
			Date of filing (<i>Day/month/year</i>)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (<i>Day/month/year</i>)
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (<i>Answer 'yes' if:</i> a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES	

Patents Form 1/77

9. Enter then number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10 —

Claims(s) 2 —

Abstract 1 —

Drawing(s) 3 + 3 8

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) 1 /


Request for substantive examination (*Patents Form 10/77*)

Any other documents
(Please specify)

11. I/We request the grant of a patent on the basis of this application

Signature

Date 10/11/2003

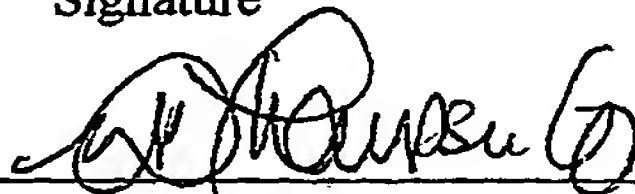

12. Name and daytime telephone number of person to contact in the United Kingdom R.J. BARTLE:
0151-709-3961.

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

DESCRIPTION

ASYMMETRIC ROLLER CROWN

The present invention is concerned with the formation of rollers in a rolling-traction toroidal-race type of continuously variable ratio transmission device ("variator").

Such variators are well known in the field of motor vehicle transmissions and have potential applications in certain other fields. They comprise at least two races which are co-axially mounted and respective facing surfaces of which are shaped to form together a cavity in the shape of a torus. Rollers disposed in the cavity each run upon the shaped surfaces of the races and serve to transmit drive from one race to the other. The angles between the roller's axes and the common axis of the races are variable (that is, the rollers are able to change their inclination) in accordance with changes in the variator's transmission ratio. In this way the variator provides a continuously variable drive ratio.

The rollers and races do not actually come into contact with each other. Instead a film of fluid (referred to as "traction fluid") is maintained between them, typically by spraying it into the region of the region of engagement between each roller and race. Drive is transmitted between roller and race by virtue of shear in the fluid film in a manner well known in this art.

In order to illustrate and explain the design of existing variator rollers, reference is directed

to Figure 1 which is a highly simplified section in a plane containing the variator axis through selected components of a variator of "full toroidal" type. The two variator races are seen at 2,4 and the variator axis about which they rotate is indicated at 6. The shaped faces 8,10 of the respective races together define a cavity 12 which is generally toroidal, its section in any plane containing the variator axis comprising two circles to either side of the axis (although because the races do not meet the circles defined by them are incomplete). The centre point of the circle defined by the races is indicated by crosses 14 in both the upper and lower halves of the drawing. The locus of such points is a circle about the variator axis which will be referred to as the centre line of the cavity.

The drawing shows only one roller 16 although in a practical variator a plurality of rollers is typically provided. Also to make the drawing as simple as possible the roller is positioned such that its axis lies in the plane of the paper. The roller's outer perimeter has a crowned profile at 17. This profile is, when viewed as in Figure 1 in a sectional plane containing the roller axis, an arc of a circle. The curvature of the crown has a slightly smaller radius than the curvature of the adjacent faces of the variator races. This difference has been exaggerated in Figure 1 for clarity. A dotted line 18 in Figure 1 represents what will be referred to as the centre plane of the roller, which is the plane perpendicular to the roller axis 20 and half way along the crown of the roller. In the prior art roller design, the crown is symmetrical about the centre plane. The centre of curvature of the crown lies in the centre plane of the roller. It will be convenient in the following discussion to refer to the roller centre, which is the intersection of the roller axis 20 with the centre plane 18 and is

indicated at 22.

To generate pressure in the regions of engagement between the roller and the races, an "end load" force (indicated by an arrow 24) is applied to one of the races, urging it toward the other. This force is resisted by the roller interposed between the two races and tends to cause the roller to assume a position in which its centre 22 lies upon the centre line 14 of the toroidal cavity, since to move away from this position the roller must force the two races away from each other against the end load. It has hitherto been assumed that in operation the roller consequently adopts such a position.

The present invention results from a recognition that when the variator is operating the roller centre does not in fact precisely coincide with the centre line of the toroidal cavity. Instead the roller centre 22 is slightly outwardly displaced from the cavity centre 14, as seen in the drawing. This displacement is again somewhat exaggerated in the drawing so that it can be clearly seen.

For optimal roller performance it is necessary to take account of this observation in designing the roller crown.

It should be noted that the design of the crown described above is appropriate specifically to variators of the "full toroidal" type. In another type of variator, referred to herein as "part toroidal", the roller profile is highly asymmetric because the roller is positioned radially

inward of the centre line of the cavity defined between the variator races. In part toroidal variators the pressure exerted upon the rollers by the races tends not to constrain the roller to a required position (as in the full toroidal type) but to urge the rollers radially outward. This outward biasing of the rollers must be resisted by the roller mountings, e.g. through a thrust bearing. An example, chosen from a large body of patent literature relating to such variators, is US 5368529, Machida. The present invention is not relevant to such variators.

In accordance with the present invention there is a roller for a variator of the type in which a pair of races together define a substantially toroidal cavity, the roller is disposed in the cavity and runs upon the races to transfer drive between them, and the roller's radial position is determined by the effect of the races upon it, the roller having an outer perimeter which, viewed in a sectional plane containing the roller axis, has a convex profile and which is not symmetrical about any plane perpendicular to the roller axis.

This asymmetry of the roller perimeter serves to allow for the displacement of the roller from the centre of the toroidal cavity.

Specific embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which :-

Figure 1 is a highly simplified section, in a plane containing the variator axis, through certain major components of a known full toroidal rolling traction type variator;

Figure 2 is a further simplified illustration of major components of a known full toroidal rolling traction type variator, viewed along a radial direction and partly in section; and

Figure 3 is a section, in a plane containing the roller axis, through a roller constructed in accordance with the present invention.

It is not intended to provide a detailed description of the construction and operation of a toroidal race type variator herein. Such details are known in the art and are to be found in various published patents and applications in the name of Torotrak (Development) Ltd including for example EP444086. However to assist the reader a brief description of the principle of operation of one particular toroidal race variator will now be provided with reference to Figure 2. This variator has a pair of outer discoidal races 30, 32 with respective shaped faces 34, 36 both facing toward respective shaped faces 38, 40 of an inner discoidal race 42. Hence two toroidal cavities 44, 46 are defined and each cavity in this example contains three rollers which move in unison with each other, although for the sake of clarity only one of the rollers 48 is illustrated. The common axis of the races is defined by a shaft 50. The inner race 42 is journalled to be rotatable independently of the shaft while the outer races are coupled to the shaft such as to rotate along with it. In the case of right hand outer race 32 this coupling is achieved by means of splines 52 so that some axial displacement of this race is possible under the influence of a hydraulic end load actuator 54. Because the inner race 42 has some axial "float" and the left hand outer race 30 is axially fixed relative to the shaft, the end load force from the actuator 54 serves to urge all three races toward

each other, creating the pressures needed for engagement of the rollers with the races. Drive can be input to the variator through the shaft 50 and taken off from the inner race 42, or vice versa.

Each roller is journalled in a carriage 56 acted upon by a hydraulic roller actuator 58 which biases the roller along a direction generally circumferential with respect to the races and the roller is able to move along this direction. As well as being capable of this translational motion, the roller is also able to "precess". That is, the inclination of the roller can vary about an axis 60 determined by the arrangement of the roller and its actuator 58. Because this precession of the rollers (which is executed by all of the rollers in unison) changes the relative diameters of the paths traced upon the races by the rollers, it is accompanied by a change in variator ratio. The axis 60 is inclined to the axis of the variator shaft 50, as shown, and consequently translational movement of the roller back and forth along the circumferential direction is accompanied by corresponding precessional movement and ratio change. Hence by controlling the force from roller actuator 58, the variator behaviour is controlled.

Note that the roller's mountings allow it also some freedom to move toward / away from the shaft 50. As already explained, the roller's radial position is determined not by its mountings but by the influence of the races. It has also been explained above that the roller centre is in operation not precisely coincident with the centre line of the toroidal cavity. This is contrary to expectation but is confirmed by observation of the pattern of wear on the

roller. Engagement between the roller and race produces a wear band upon the roller crown and on the symmetrical type of roller described with reference to the prior art this band is slightly displaced from the centre of the crown, this displacement being interpreted as an indication of the displacement of the roller from the centre of the cavity.

The explanation for this displacement is believed to be as follows (although this explanation is not intended in any way to limit the scope of the invention as claimed). There is relative motion between the surfaces of the roller and race in the region where one engages with the other and this can be thought of as comprising two components:-

i. a linear relative motion along a direction tangential to the circle traced upon the race by the roller. This relative linear motion is inevitable in order to create the required shear in the film and is referred to herein as "slip"; and

ii. relative rotational motion of the two surfaces. This arises because the surface of the race is of course following a path which is a circle centred upon the race axis. It is referred to herein as "spin".

Furthermore the region of engagement between the roller and the race is not a point contact but extends across a significant part of the roller crown due to the depth of the traction fluid film through which the engagement takes place. The effect of the combination of slip and spin over a finite region of engagement is that the force exerted upon the roller by the fluid comprises not only a circumferential component (as necessary for the roller to transfer drive to/from the race) but also a lateral component. It is this lateral component which urges the roller away from the variator shaft and causes the aforementioned displacement.

Since the roller displacement was first recognised, a paper analysing the forces in an engagement involving both shear and spin has been found. "Observations of Viscoelastic Behaviour of an Elastohydrodynamic Lubricant Film", Johnson and Roberts, published in *Proceedings of the Royal Society of London, Series A, Mathematical and Physical Sciences, Volume 337, Issue 1609 (March 19, 1974) pages 217-242*, provides a mathematical analysis of the behaviour of fluid in this type of engagement, although it concerns itself with lubricant films in general (e.g. between gear teeth) and its relevance to the present phenomenon is believed not to have been previously recognised.

The displacement of the region of engagement from the centre of the roller crown could have a deleterious effect upon roller performance. The compressive forces upon the rollers are very large in motor vehicle variators. The working lifetime of the roller is one of the major factors in longevity of the variator as a whole and needs to be maximised. An asymmetric stress distribution is undesirable in this context. Also there are incentives to minimise the width of the roller and its crown but this must be done without causing the region of engagement to extend beyond the crown itself, since it is believed the tribology of the engagement would then be impaired.

For both reasons it is desirable to centre the region of engagement on the roller crown. On the face of it this might appear highly problematic because the forces determining the displacement of the roller centre are in practice subject to constant variation. The end load, tending to centre the roller in the cavity, is in current variators deliberately varied by

changing the pressure in the end load actuator 54 according to operating conditions. The lateral force tending to displace the roller centre also varies with end load and other factors. It might be assumed therefore that the roller displacement would vary significantly in operation. However it has been established that, to an acceptable approximation, the above variations cancel each other out and the roller displacement can be taken to be constant.

Consequently the displacement of the roller can be compensated by appropriate design of the roller crown and a suitable roller 70 is illustrated in Figure 3. The centre plane of the roller is indicated by a dotted line 72 and is again defined as the plane perpendicular to the roller axis and containing the mid point of the crown. The crown is, in this section through the roller, seen to be shaped as an arc of a circle 75 whose centre 76 is offset from the roller's centre plane. It is this offset which compensates for the roller displacement. The resulting crown is not symmetrical about the centre plane (nor about any other plane perpendicular to the roller axis.) This asymmetry causes the region of engagement between the roller and the race to be positioned at, or at least nearer to, the centre of the crown than in the prior art.

The illustrated crown design is not considered to be the only possible design to achieve the desired result. For example the shape of the crown need not be an arc of a circle as such.

Because of its asymmetry, the roller must be correctly orientated during assembly, a requirement which did not arise with the symmetrical prior art roller. It is desirable to guard

against incorrect assembly and this may for example be achieved by forming bearings on the two sides of the roller with different interior diameters, a shaft 78 carrying the roller being complementarily formed so that it cannot be wrongly inserted.

CLAIMS

1. A roller for a continuously variable ratio device ("variator") of the type in which a pair of races mounted for rotation about a common axis together define a substantially toroidal cavity, the roller is disposed in the cavity and runs upon the races to transfer drive between them, and the roller's radial position is determined by the effect of the races upon it, the roller having an outer perimeter which, viewed in a sectional plane containing the roller axis, has a convex profile and which is not symmetrical about any plane perpendicular to the roller axis.
2. A roller as claimed in claim 1 wherein the largest diameter of the roller crown is offset from the mid point of the crown.
3. A roller as claimed in claim 1 or claim 2 wherein the roller crown, viewed in the aforementioned sectional plane, is an arc of a notional circle whose centre is offset from the centre plane, defined as the plane perpendicular to the roller axis containing the mid point of the crown.
4. A variator comprising a roller as claimed in any preceding claim, the variator further comprising a pair of races mounted for rotation about a common axis and together defining a substantially toroidal cavity, the roller being disposed in the cavity and running upon the races to transfer drive between them..

5. A variator as claimed in claim 4 wherein the largest diameter of the roller crown is displaced from the mid point of the crown in a direction toward the variator axis.
6. A variator as claimed in claim 4 or claim 5 wherein the regions of engagement between the roller and the races are centred upon the crown of the roller despite the roller centre being offset in operation from the centre line of the toroidal cavity.
7. A variator roller substantially as herein described with reference to and as illustrated in accompanying Figure 3.
8. A variator substantially as herein described with reference to and as illustrated in accompanying Figures 2 and 3.

ABSTRACTASYMMETRIC ROLLER CROWN

A roller is disclosed for a continuously variable ratio device ("variator") of the type in which a pair of races 2, 4 is mounted for rotation about a common axis. The races together define a substantially toroidal cavity 12, 44, 46. The roller 16, 48 is disposed in the cavity and runs upon the races to transfer drive between them. Its radial position is determined by the effect of the races upon it. The roller has an outer perimeter which, viewed in a sectional plane containing the roller axis, has in accordance with the invention a convex profile which is not symmetrical about any plane perpendicular to the roller axis. In this way, a displacement of the roller from the centre line of the toroidal cavity is accommodated.

Fig. 3

Figure 1.

1/3

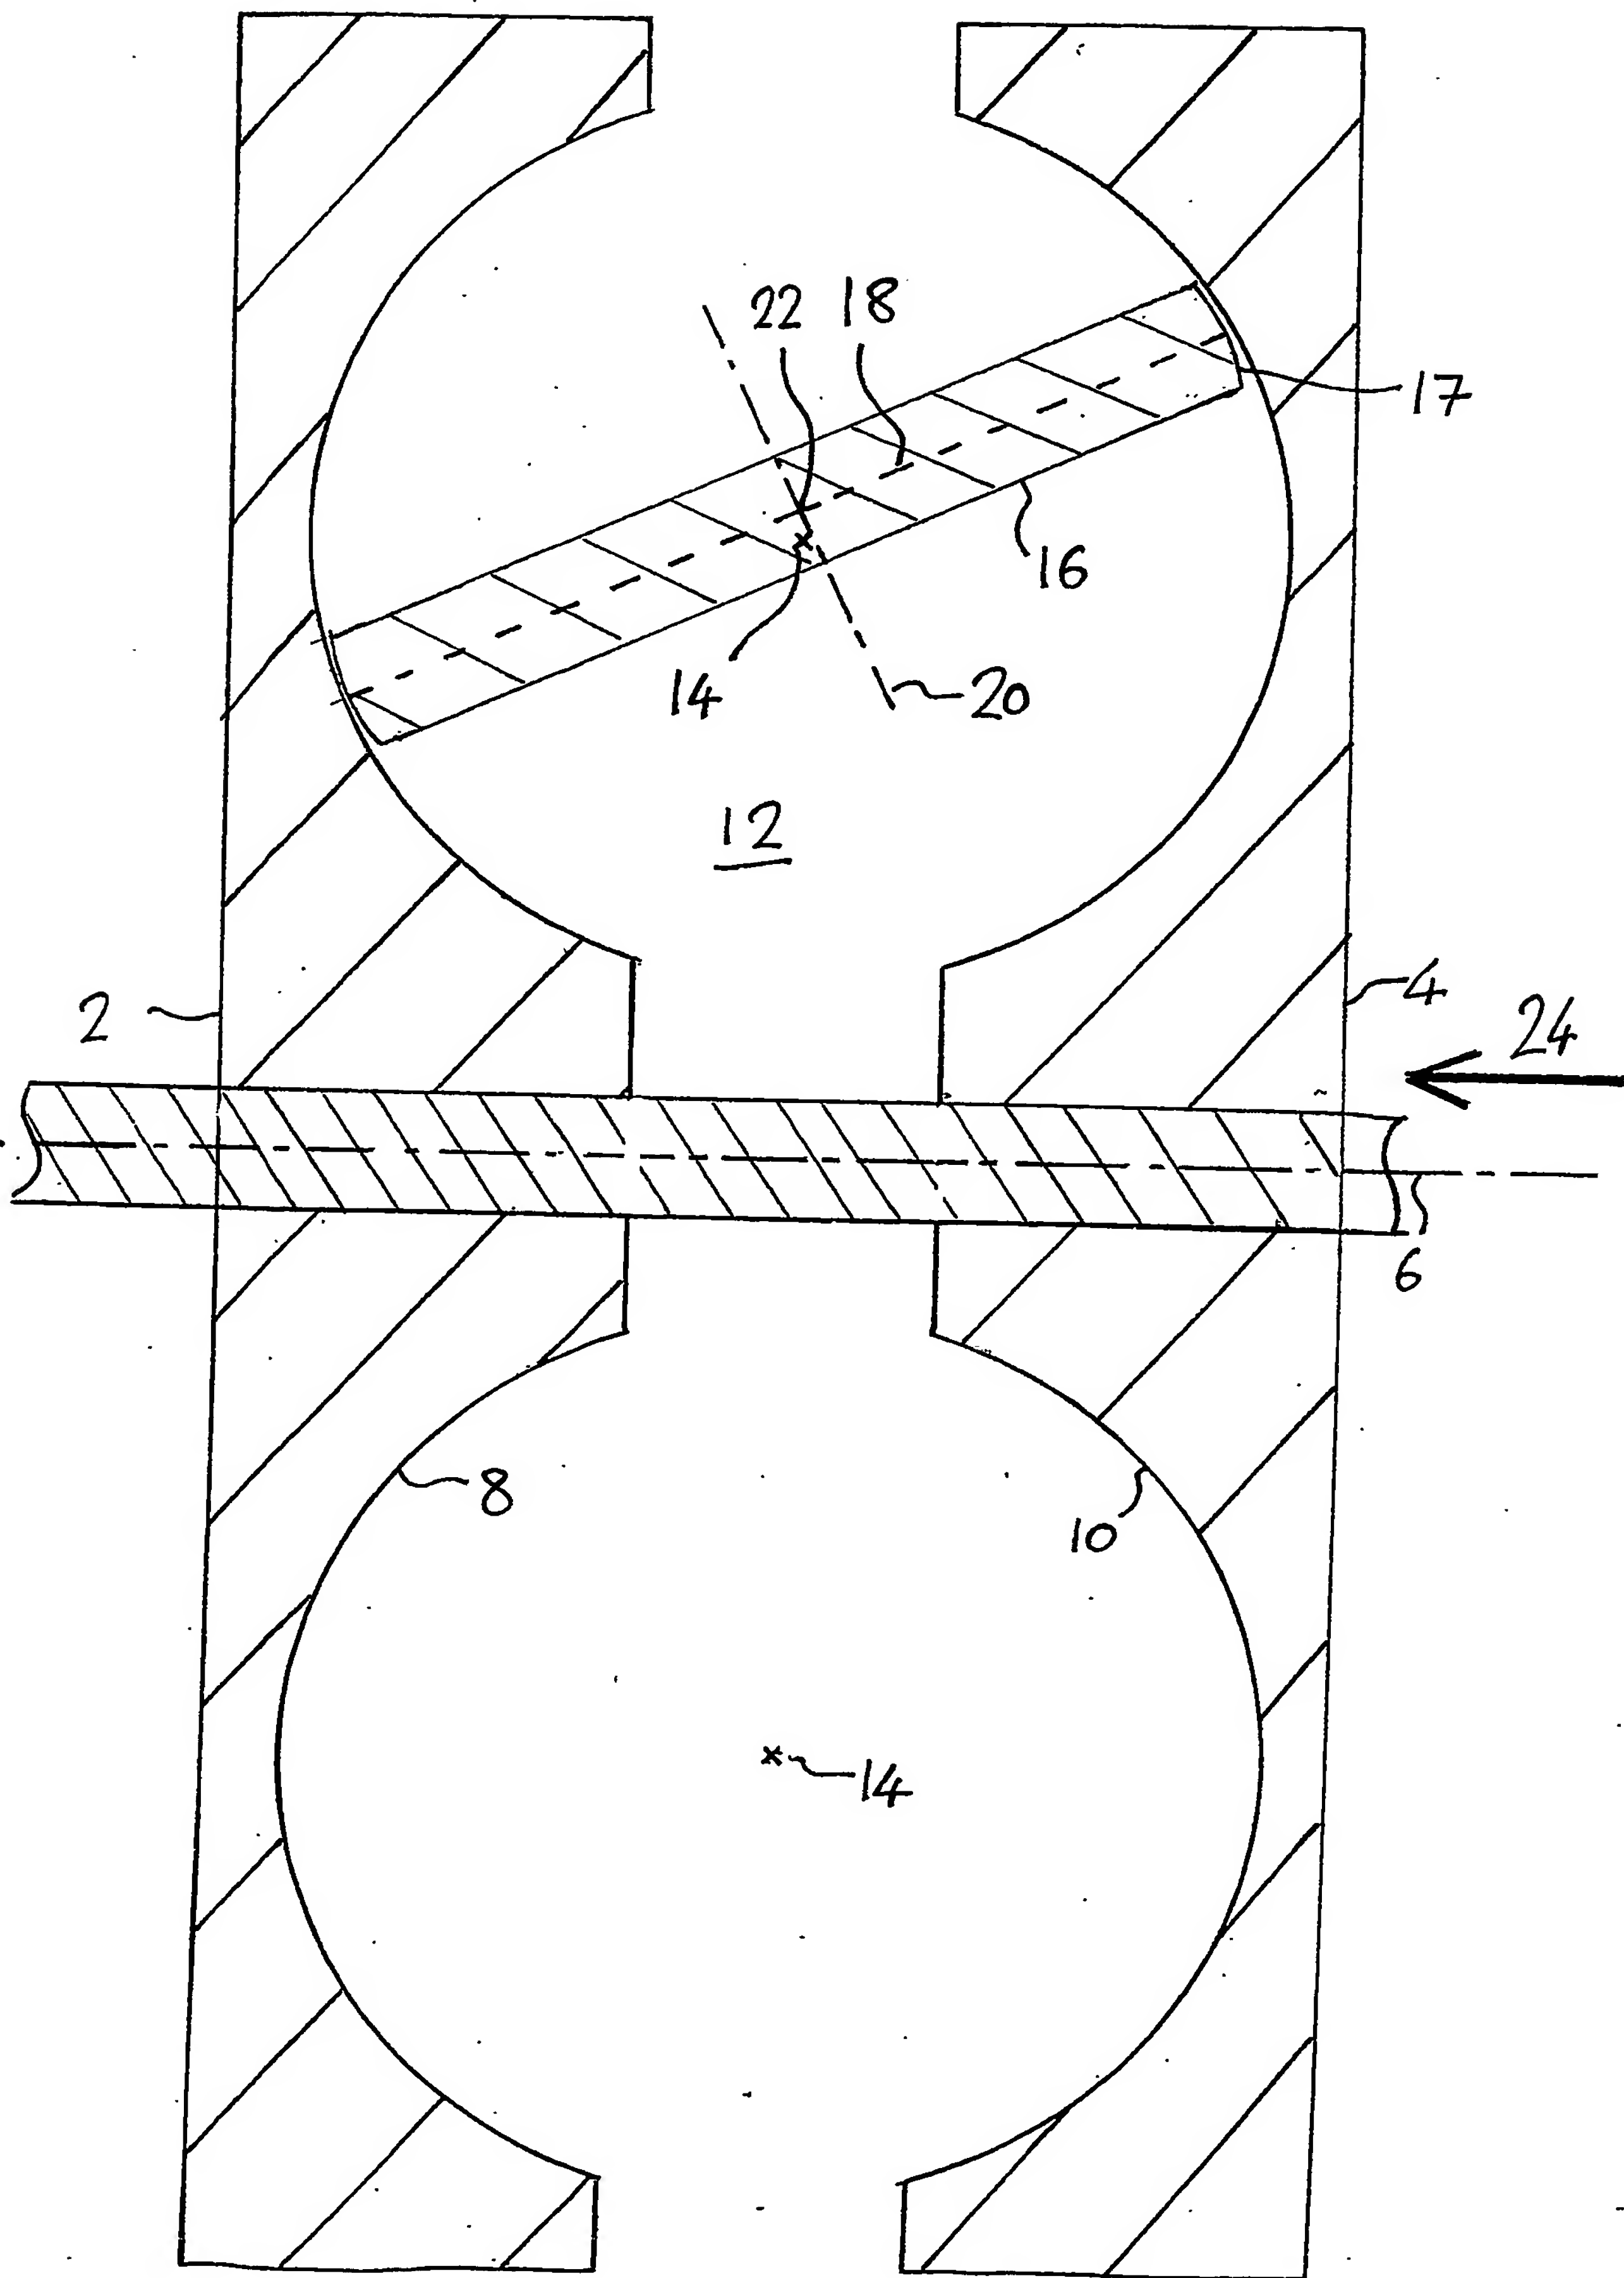


Figure 2

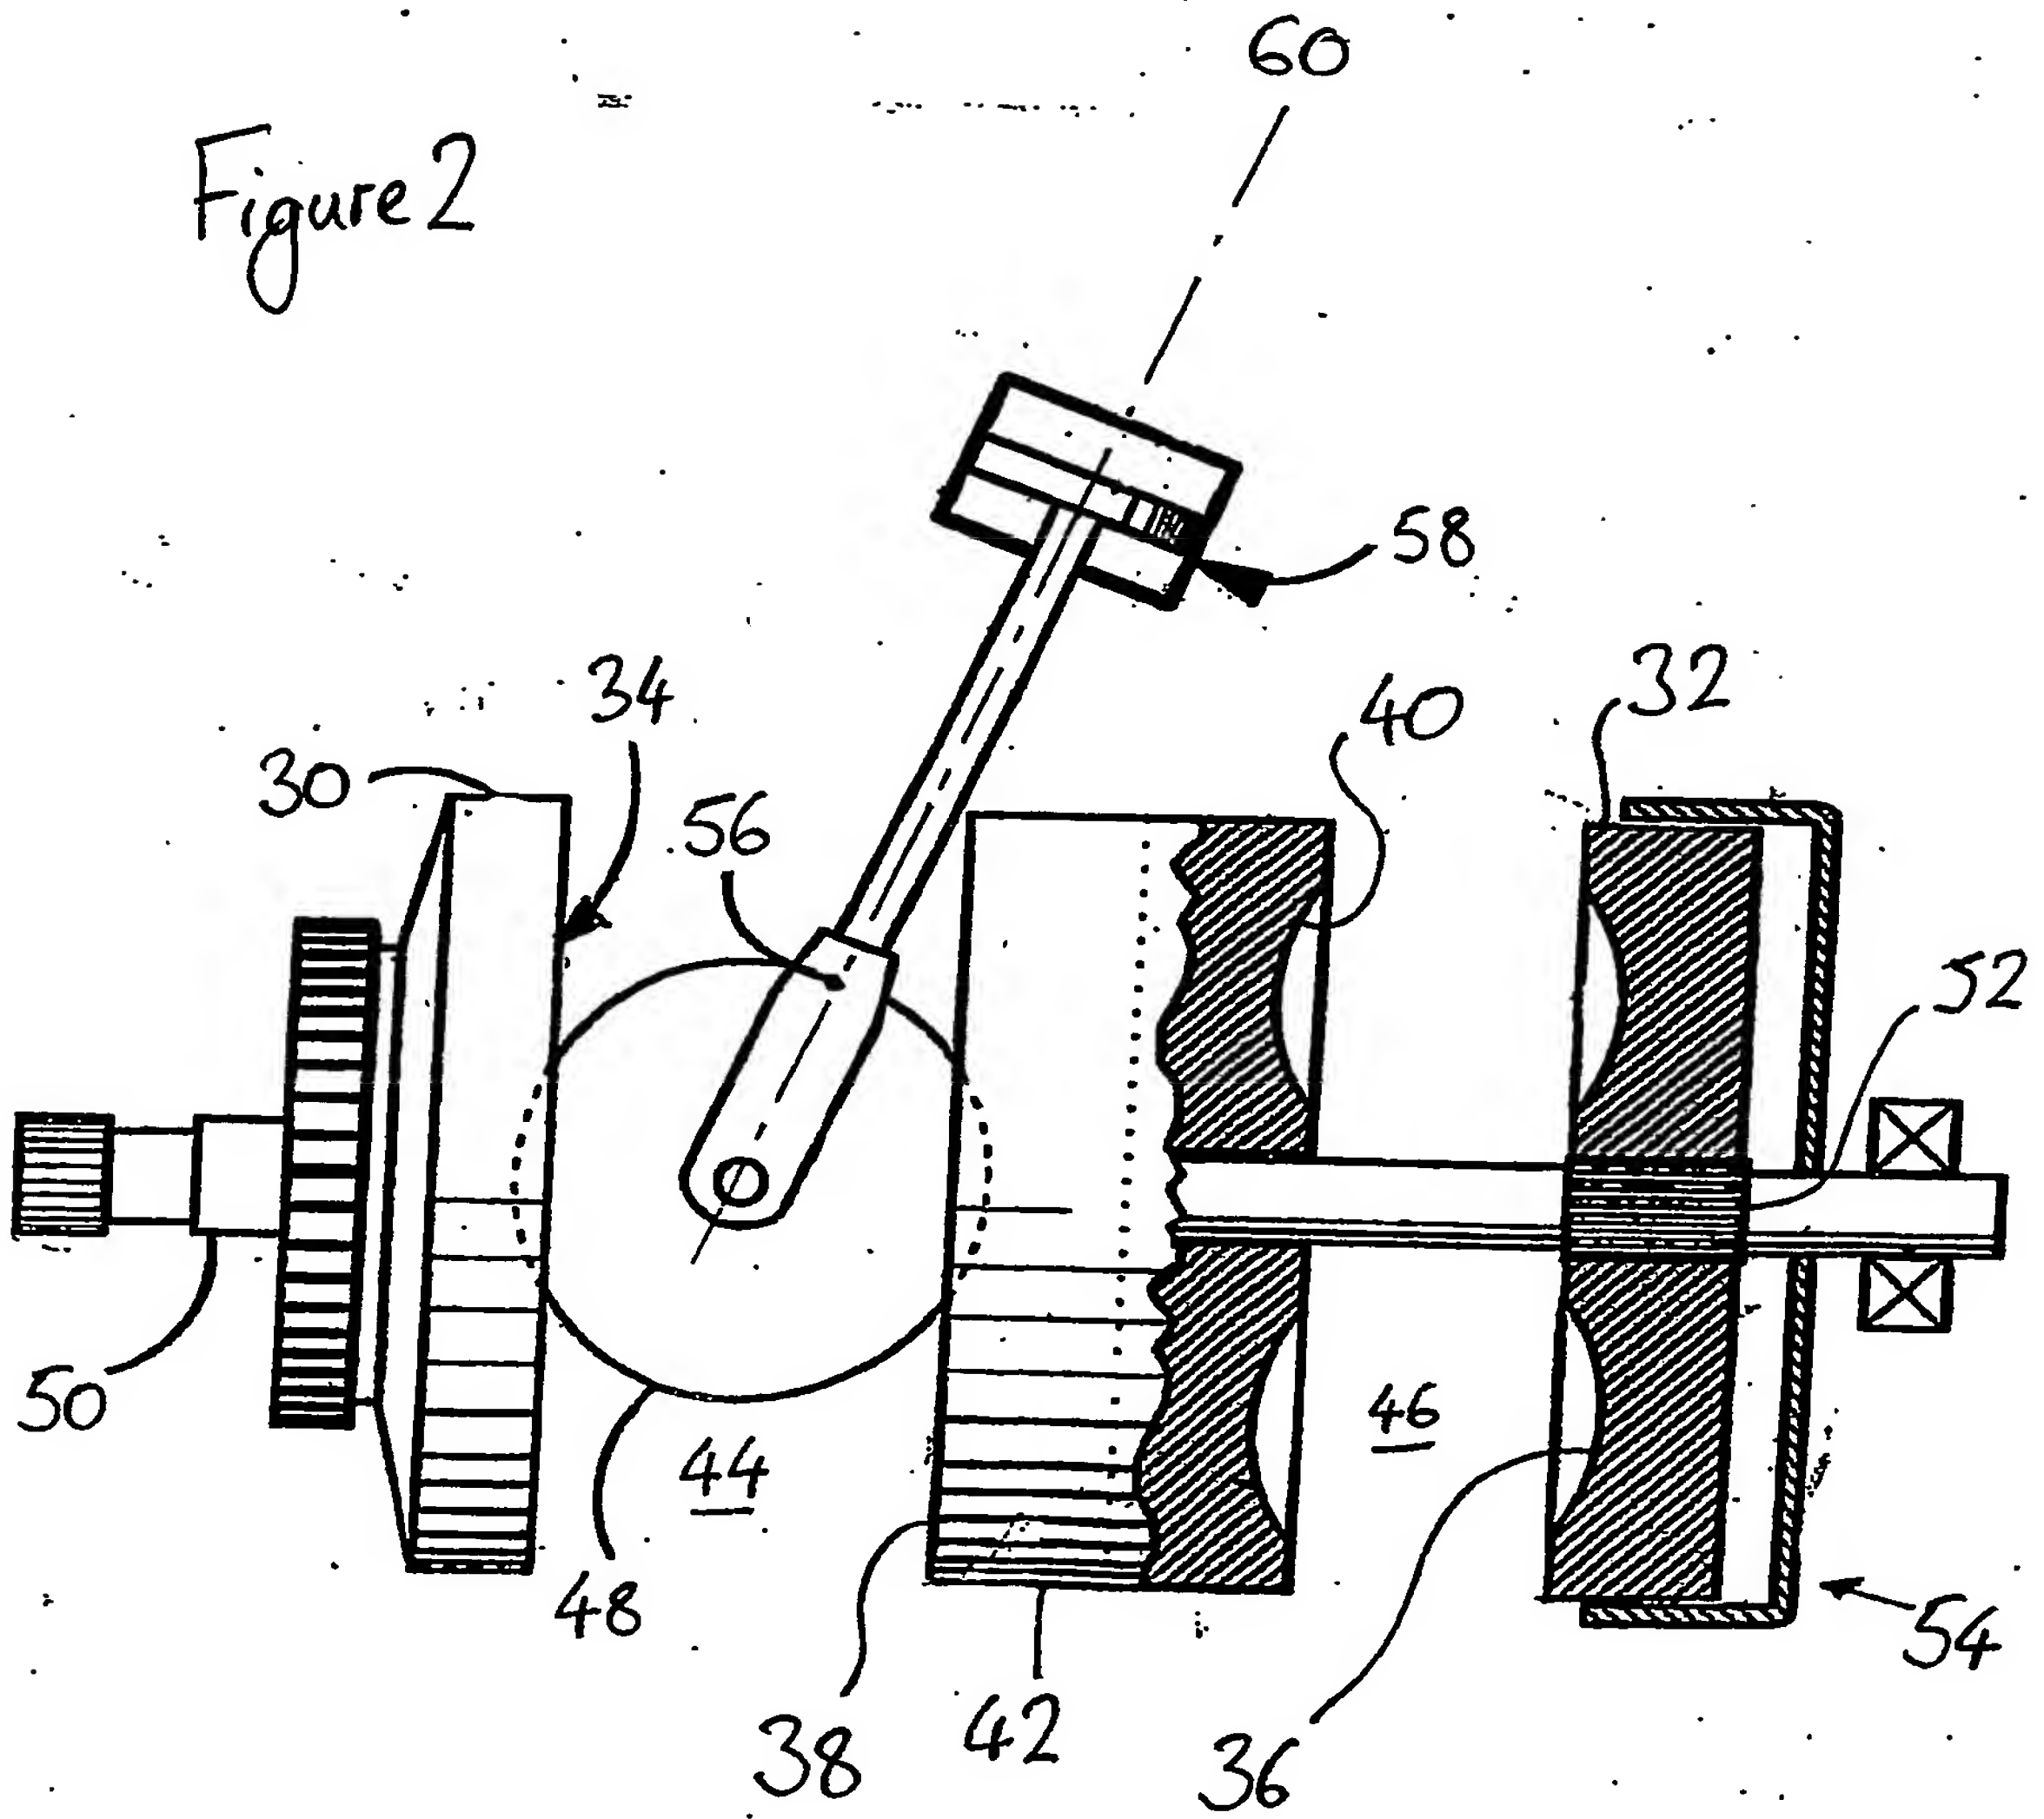


Figure 3

